

# 1600 Series

- Spun Octagon
- Available in heights up to 25'

## Pole Dimensions

Pole No.	[A] Above Ground Height	[B] Burial Depth	[C] Tip Diameter	Base Diameter	Est. Pole Weight (lbs)**
D1609	9'	4' 4"	5-3/4"	18"	820
D1610	10'	4' 4"	5-3/8"	18"	850
D1611*	11'	4' 4"	8"	18"	900
D1613	13'	5'	6-1/4"	18"	1,000
D1615	15'	5'	6"	18"	1,100
D1620	20'	5'	5-3/8"	18"	1,275
D1625	25'	5'	4-3/4"	18"	1,450


\*Decorative flare tip.

\*\*Pole weight may vary based on color of aggregate.


## Pole Code

Mounting Type	Series + Above Ground Height	Color	Finish	Sealer	Options
(D) Direct Burial (A) Anchor Base	1609 1610 1611 1613 1615 1620 1625	(SG) Sky Gray (PG) Pearl Gray (SP) Salt & Pepper (CN) Cinnamon (BZ) Bronze (CB) Charcoal Black (MS) Midnight Sky Black (EB) Eclipse Black (DB) Dark Black (SR) Sedona Red (AR) Antique Red (RG) Red Granite (TC) Terra Cotta (KG) Kelly Green (AW) Alpine White	(E) Etched	(A) Acrylic (W) Waterseal (G) Anti-Graffiti	(B) Banner Arm (C) Clamp-on Arm (I) Threaded Insert (O) Outlet (T) Tenon  Standard tenon size 2-7/8" OD x 3" tall

Example Code: **D1615** - **SG** - **EA** - **3T**




Cross Section

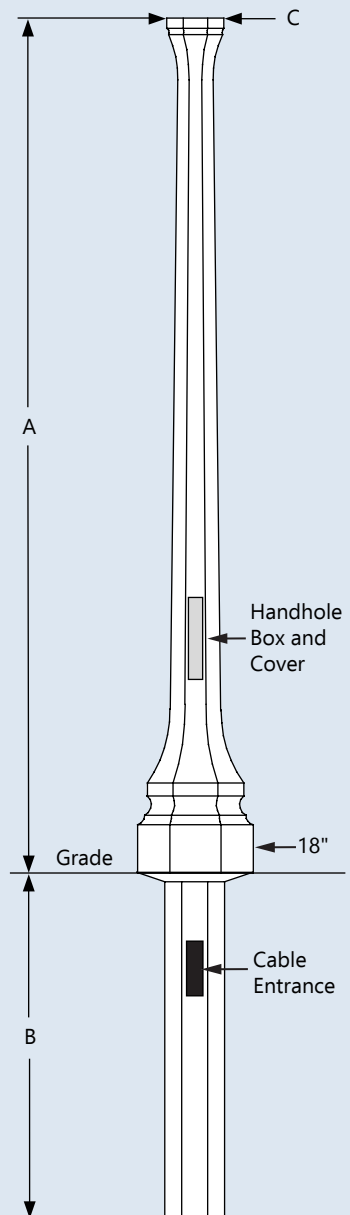



## Base Detail

### DIRECT BURIAL

\*Backfill type based on soil of location and recommendation of qualified civil engineer.

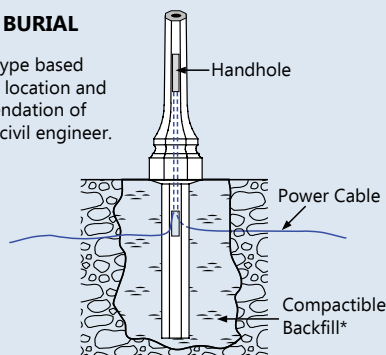

### ANCHOR BASE



PO Box 157  
W142 N9110 Fountain Blvd.  
Menomonee Falls, WI 53052-0157  
(888) 719-7599  
(262) 250-7598 fax  
info@concretepoles.com  
www.concretepoles.com