



200 Series

- Spun straight-taper octagon
- 1/8" taper per foot
- Available in lengths up to 37'

Pole Dimensions

Pole No.	[A] Above Ground Height	[B] Burial Depth	[C] Tip Diameter	[D] Base Diameter	Est. Pole Weight (lbs)*
D216	16'	5'	6"	8"	900
D220	20'	5'	6"	8-1/2"	1,200
D225	25'	6'	6"	9-1/8"	1,375
D227	27'	6'	6"	9-3/8"	1,500
D228	28'	6'	6"	9-1/2"	1,600
D229	29'	6'	6"	9-5/8"	1,700
D230	30'	6'	6"	9-3/4"	1,800
D231	31'	6'	6"	9-7/8"	1,900

*Pole weight may vary based on color of aggregate.

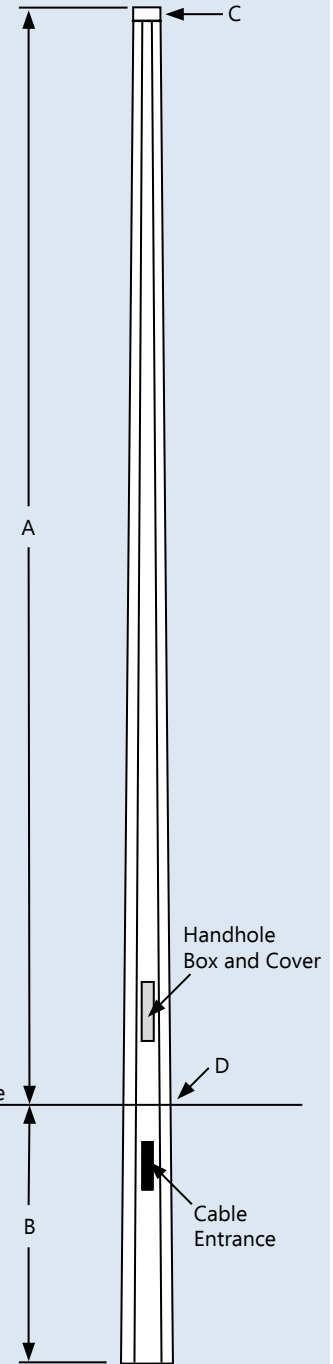

Pole Code


Mounting Type	Series + Above Ground Height	Color	Finish	Sealer	Options
(D) Direct Burial (A) Anchor Base	216 220 225 227 228 229 330 231	(SG) Sky Gray (PG) Pearl Gray (SP) Salt & Pepper (CN) Cinnamon (BZ) Bronze (CB) Charcoal Black (MS) Midnight Sky Black (EB) Eclipse Black (DB) Dark Black (SR) Sedona Red (AR) Antique Red (RG) Red Granite (TC) Terra Cotta (KG) Kelly Green (AW) Alpine White	(E) Etched (P) Polished	(A) Acrylic (W) Waterseal (G) Anti-Graffiti	(C) Clamp-on Arm (D) Davit Arm (F) Finial (I) Threaded Insert (O) Outlet (T) Tenon Standard tenon size 2-7/8" OD x 3" tall

Example Code: **D231** - **SG** - **PA** - **T**



Base Detail

DIRECT BURIAL

*Backfill type based on soil of location and recommendation of qualified civil engineer.

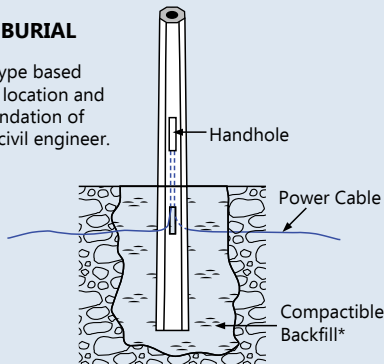

ANCHOR BASE



PO Box 157
W142 N9110 Fountain Blvd.
Menomonee Falls, WI 53052-0157
(888) 719-7599
(262) 250-7598 fax
info@concretepoles.com
www.concretepoles.com