

600 Series

- Spun decorative octagon
- 1/12" taper per foot
- Available in heights up to 16'

Pole Dimensions

Pole No.	[A] Above Ground Height	[B] Burial Depth	[C] Tip Diameter	[D] Base Diameter	Est. Pole Weight (lbs)*
D606	6'	4' 6"	6"	14-3/8"	690
D608	8'	4' 6"	5-3/4"	14-3/8"	730
D610	10'	4' 6"	5-5/8"	14-3/8"	780
D612	12'	4' 6"	5-1/2"	14-3/8"	830
D613	13'	4' 6"	5-3/8"	14-3/8"	850
D614	14'	4' 6"	5-1/4"	14-3/8"	870
D615	15'	4' 6"	5-1/4"	14-3/8"	880
D616	16'	4' 6"	5-1/8"	14-3/8"	900

*Pole weight may vary based on color of aggregate.

Pole Code

Mounting Type	Series + Above Ground Height	Color	Finish	Sealer	Options
(D) Direct Burial (A) Anchor Base	606 607 608 610 612 614 615 616	(SG) Sky Gray (PG) Pearl Gray (SP) Salt & Pepper (CN) Cinnamon (BZ) Bronze (CB) Charcoal Black (MS) Midnight Sky Black (EB) Eclipse Black (DB) Dark Black (SR) Sedona Red (AR) Antique Red (RG) Red Granite (TC) Terra Cotta (KG) Kelly Green (AW) Alpine White	(E) Etched (P) Polished	(A) Acrylic (W) Waterseal (G) Anti-Graffiti	(B) Banner Arm (F) Finial (I) Threaded Insert (O) Outlet (T) Tenon Standard tenon size 2-7/8" OD x 3" tall


Example Code:

D616 — **SG** — **EA** — **T**





Base Detail

DIRECT BURIAL

*Backfill type based on soil of location and recommendation of qualified civil engineer.

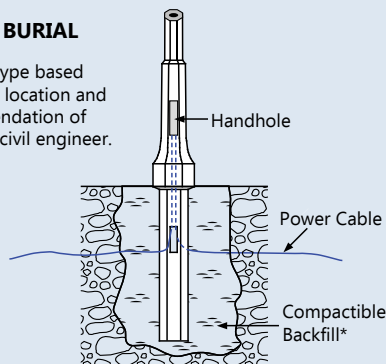

ANCHOR BASE

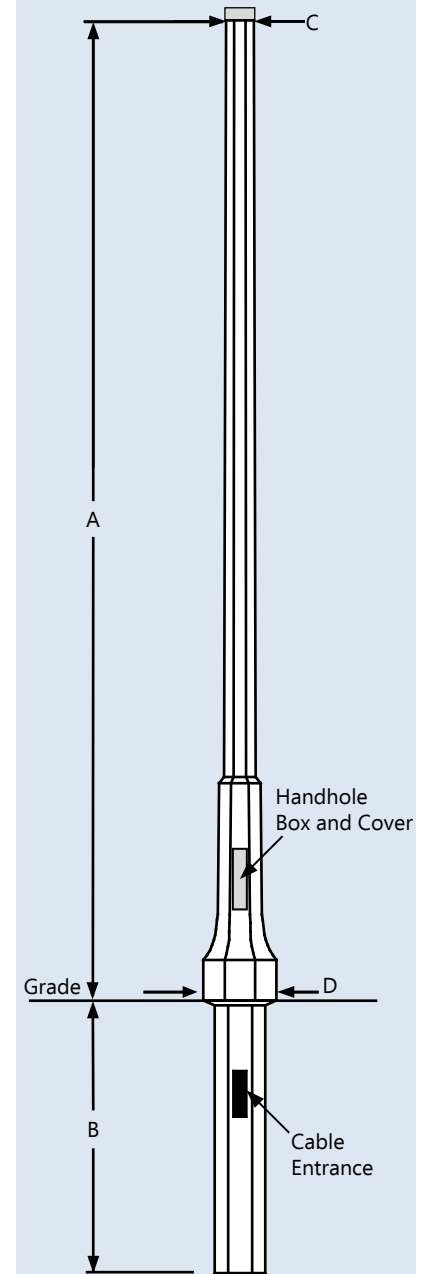

PO Box 157
W142 N9110 Fountain Blvd.
Menomonee Falls, WI 53052-0157
(888) 719-7599
(262) 250-7598 fax
info@concretepoles.com
www.concretepoles.com